



PEŠTAN
CONFLUO
CLEVER DRAINS

DRAINAGE SYSTEM

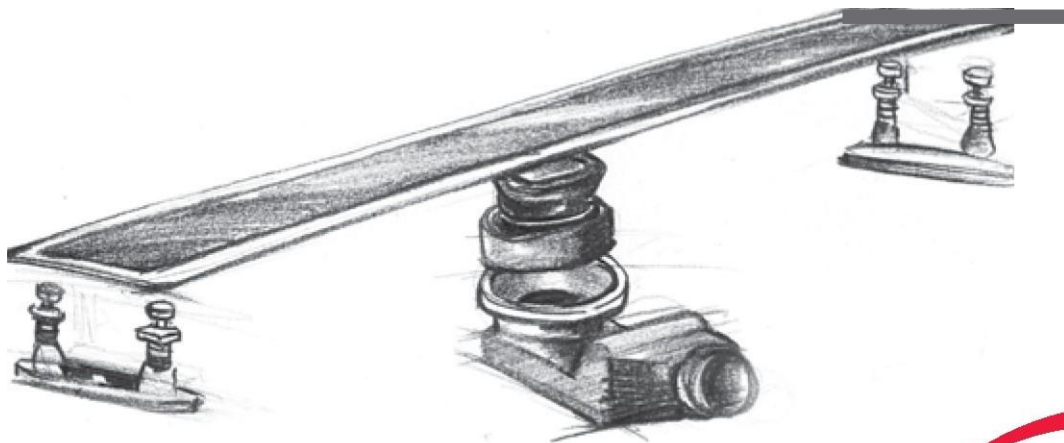


altay
PLUMBING

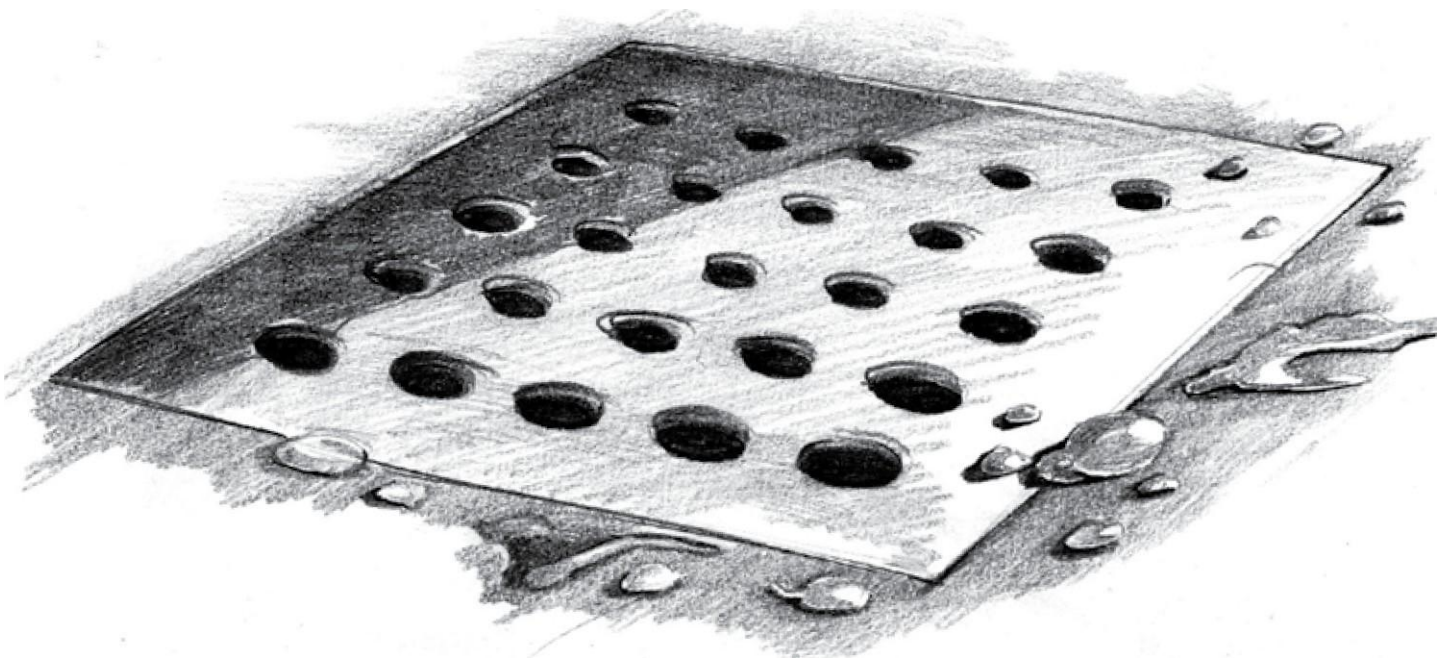

Reliability. Quality. Innovation.

Pešťan floor drainage system **CONFLUO**

Pešťan CONFLUO drainage system is a modular system designed for bathroom and floor drainage. Its application field ranges from installation in the bathrooms with no obstacles (wheelchair accessible), floor drainage in the public buildings to balcony, roof and cellar floor drainage. **Pešťan CONFLUO** is the best choice for you and your needs.

This system provides a possibility of combining several bases for all drainage types, sealing methods, elements of drain and grate. As a result, it can precisely meet certain requirements and applications. All components of **Pešťan CONFLUO** system have the same thing in common: **QUALITY**

Pešťan drainage grates perfectly fit to the modular bathroom and floor drainage system **CONFLUO**. Top designs of grates together with luxuriously tiled floor create an extraordinary visual experience. The product portfolio includes the most various types of shower grates as well as angle, floor and bathroom drains.

LABORATORY/RAW MATERIALS

All purchased raw materials and finished products, produced in PEŠTAN are permanently checking according to requirements of standards. Through self-monitoring of production line, planned control in the Sector of quality control and external audit in the most eminent accredited laboratories and certification in certification companies in several continents, PEŠTAN guarantees the quality of its products.

Well known international producers and our suppliers such as "BOREALIS", "BASEL", "SABIC", "SCHULMAN", "MOL", "OTTOMAN", "MARNGON" guarantee that raw materials that are being used are reliable and high quality. All extruders and tools come from famous companies such as "CINCINATI", "THEYSON", "BATTENFELD", "KRAUS MAFFEI", "HAITAIAN", "IFV", "INOEX", "ATSVAR" which provides the most advanced processing technology.

CERTIFICATES

The entire production of PEŠTAN Company is adapted to the European standards, as mentioned in international certificates for quality of products such as: DVGW, MPA, SABS, TZW, VUPS, EMI, SKZ and FRAUNHOFER. PEŠTAN Company has all necessary certificates for business operating in the European Union. The company operates in accordance with ISO 9001:2000 since 2004.

Year 2010 - PEŠTAN certified Integrated Quality Management System (according to the ISO 9001:2008), environmental protection (according to the ISO 14001:2004) and Healthcare and Safety at work (according to the BS OHSAS 18001:2007), which certification, supervision and recertification is performed by certification Company TUV.

QUALITY AND FUNCTIONALITY

PEŠTAN presents you Confluo brand with its sophisticated solutions that meet the needs of many designers and architects. New CONFLUO drain unites several modern solutions and represents a complete solution for water drainage in the modern bathroom. It is produced with one, two or three inputs and output with adjustable angle.

On the body of the drain it is possible to install carrier of water-proofing that provides assembly in a manner that completely prevents the entrance of water between the drain and the surrounding concrete. Height of a drain may be increased virtually unlimited by inserting a tube with a diameter of 110 mm between the body of a drain and drain grid.

FEATURES OF CONFLUO DRAINS ARE SET OUT AS FOLLOWS

- Modern solution for modern methods of construction
- Easily adjustable installation height of a sink
- Easily adjustable angle of output duct thanks to the articulated connector

- Up to three connectors for entrance of water into a drain
- Possibility of mounting a carrier of waterproofing
- The inner diameter of the drain corresponds to the pipe with a diameter of 110 mm so that pipe grid may be set away from the body of a drain

ADVANTAGES IN THE DESIGN AND USAGE

PEŠTAN Company specialized and perfected drain manufacturing for the following segments:

BATHROOM, KITCHEN, COVERED GARAGE SPACE, GARDEN, ROOF

CONFLUO gutter is manufactured from high quality POLYPROPYLENE, material that is very suitable for high-quality drainage system, which has the following characteristics: high compressive strength, light weight, it is environmentally friendly, corrosion resistant, impact and heat resistant, easy to maintain, resistant to number of chemicals.

CONFLUO drains are designed carefully and with precision in order to improve the quality of all elements, extend the life of the product, ensure good flow capacity. For CONFLUO gutters grounding is not necessary, because polypropylene does not conduct electricity.

A skilled team of designers and engineers of PEŠTAN Company provided long life of drains, as well as high amortization of sound. With low and flexible installation heights and reliable sealing, CONFLUO has a solution for every application and provides a number of possibilities and combinations of the product itself.

The great advantage of the CONFLUO drains is the position of the connector for outflow that is positioned at the same height as the surface, which allows a complete cleaning of body of a drain from sediment. CONFLUO drains are characterized with easy installation and ability to upgrade after installation. A large number of extensions (plug-ins) allow the fulfillment of all requirements at the installation.

In order to ensure that every requirement of drainage is fulfilled, professional team of PEŠTAN is always ready to respond to each specific request and thus create customized solutions.

Confluo Standard

01

SHAPE:

Square and angular

USAGE:

Private bathrooms
Bathrooms in the hostels, hospitals, fitness centers, saunas,
spas, swimming pools,
Commercial kitchens
Supermarkets,
Restaurants,
Airports,
Glazed terraces, etc.

DETAILS:

Square and angular shape, small frame height, stainless steel,
adjustable to the angle, modern design, functionality

SIZE:

Minimum height of the drain (all bases, except for the S base) : 95 mm
Minimum height of the drain with S base : 88 mm

CHARACTERISTICS:

- The mechanism of the drain itself is thinner and takes up little space under the floor
- Easy to install, adaptable to the needs because of the moving parts
- Sound isolated
- The model is characterized by low height of mechanism
- Possibility of application of modern solution of modern solutions with a classic look
- High flow
- Possibility to connect more skins into one drain (up to 3 skins)
- Drain is modular- each element of the superstructure corresponds to each base, allowing easy adaptation to various needs of the specific project
- A simple model with good features and safety systems
- Created from quality materials with high level of system security

SPECIAL ACCESSORIES FOR CONFLUO DRAINS:

Grid for hair
Irreversible valve (to prevent the return of foam, water, odour)
Siphon inserted to block the odour

TIDE 1

Article Number
13000001

Peštan CONFLUO drain "TIDE 1" made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,82 l/s. Drain with a removable odour trap (siphon), sealing water height 40 mm. Water proofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm

Installation area 110x210 mm

OPTIONAL IRRETRIVABLE VALVE




ArticleNumber
13500002





CORK


Article Number
13500003

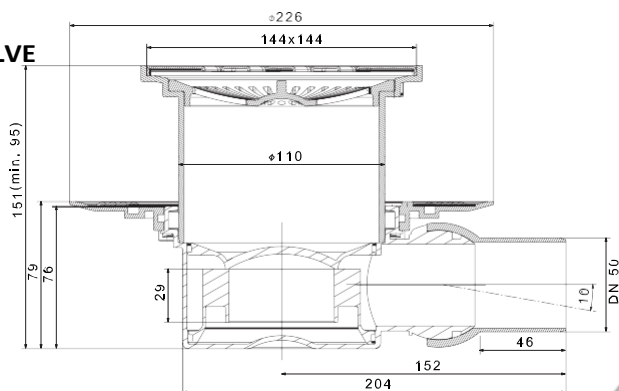

CHARACTERISTICS

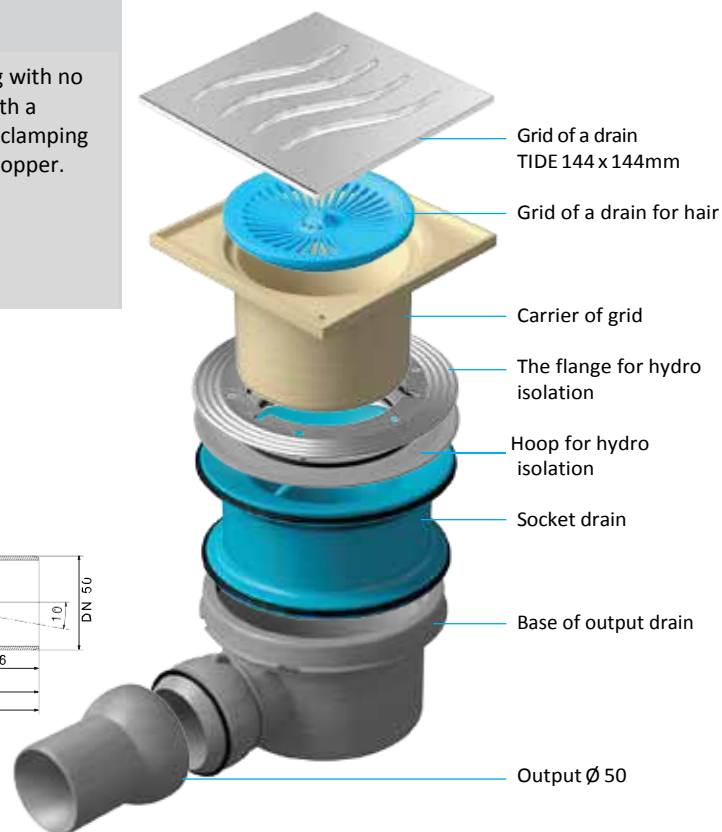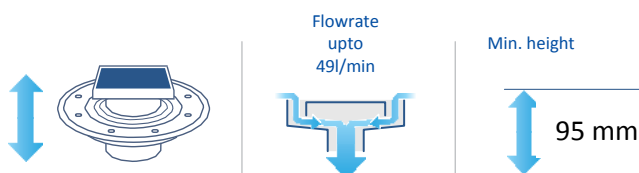

Grid Class K3



TIDE 2

Article number
13000002

Peštan CONFLUO drain "TIDE 2" made of PP (polypropylene). Sound absorbing with one side inlet of Ø40. One angle joint adjustable Ø50 outlet. Flow rate 0,82 l/s. Drain with are movable odour trap (siphon), sealing water height 40 mm. Water proofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm.

Installation area 110x270 mm

OPTIONAL IRRETRIEVABLE VALVE




Article number
13500002





CORK


Article number
13500003

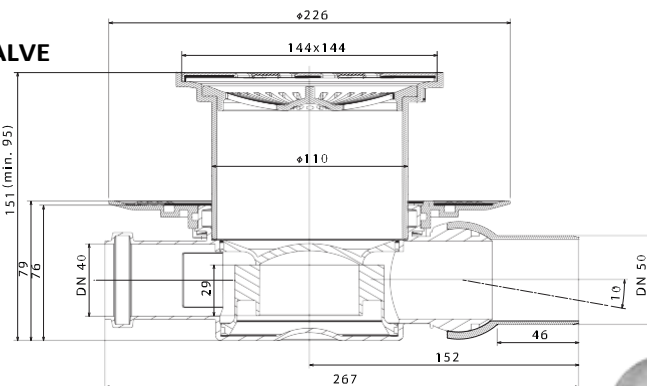

CHARACTERISTICS

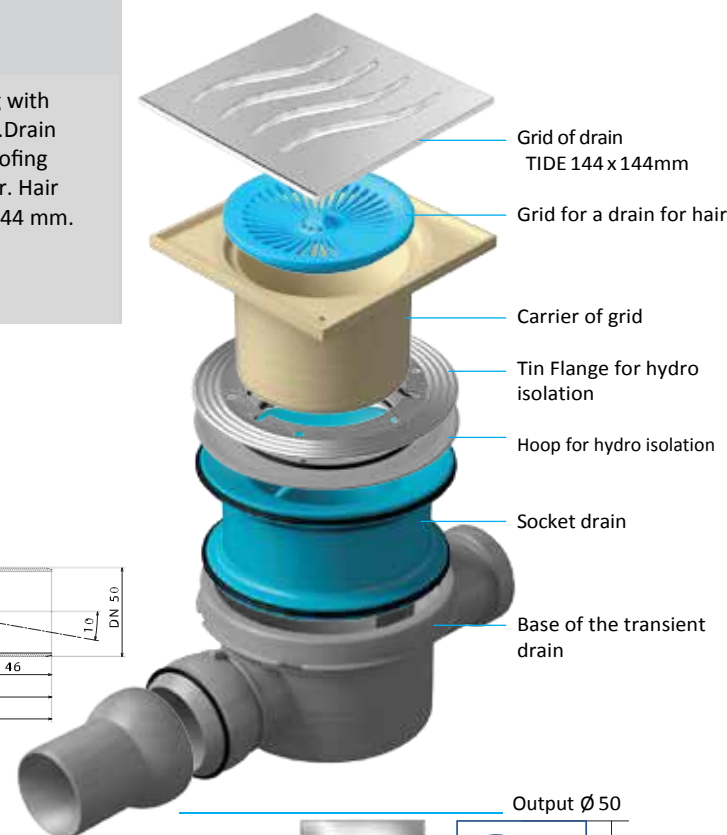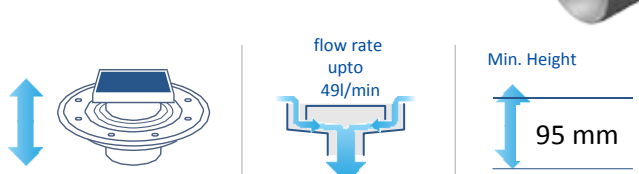

Grid Class K3



TIDE 3

Article Number
13000003

Peřtan CONFLUO drain “TIDE 3” made of PP (polypropylene). Sound absorbing with three side inlets of Ø40. One angle joint adjustable Ø50 outlet. Flow rate 0,82 l/s. Drain with are movable odour trap(siphon), sealing water height 40 mm. Water proofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm.

Installation area 230x270 mm


OPTIONAL IRRETRIEVABLE VALVE




Article Number
13500002



CORK
Article Number
13500003

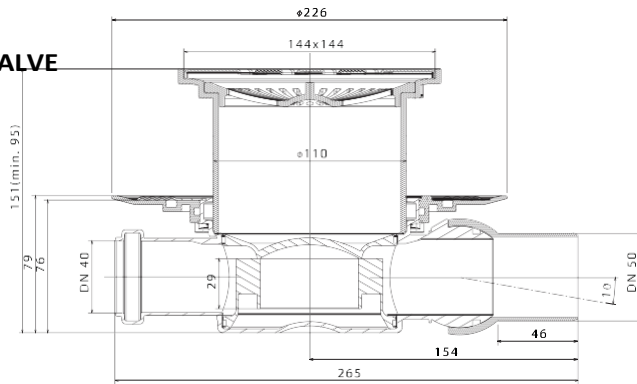

CHARACTERISTICS



Flow rate
upto
49l/min




Min. Height


95mm



Grid Class K3



confluo Standard

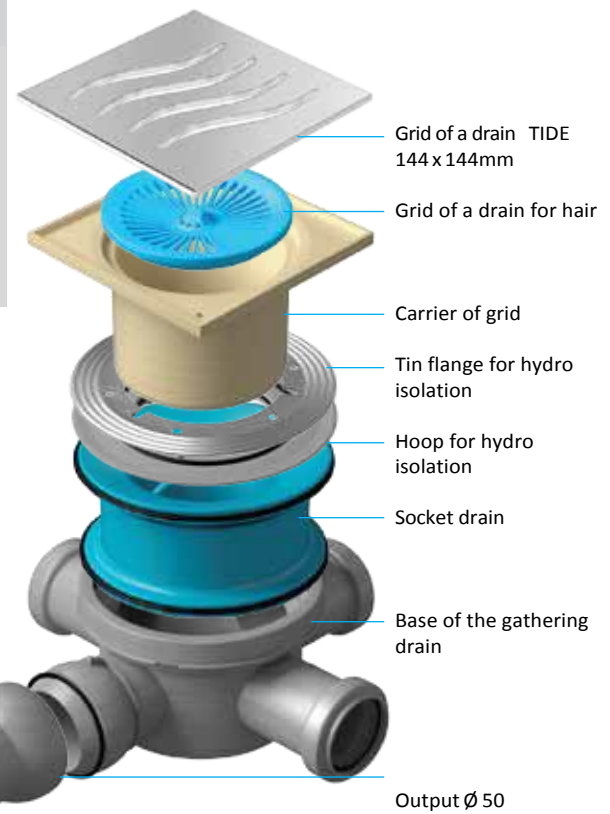

TIDE 4

Article Number
13000004

Peřtan CONFLUO drain “DRY 1” made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,82 l/s. Drain with a removable odour trap (siphon) of dry drain, sealing water height 38 mm. Removable water proofing clamping ring that allows the water proofing flange to be installed on it. Height adjustable dry drain grate holder. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 94x94 mm.

Installation area 120x280 mm


OPTIONAL IRRETRIEVABLE VALVE




Article Number
13500002



CORK
Article Number
13500003

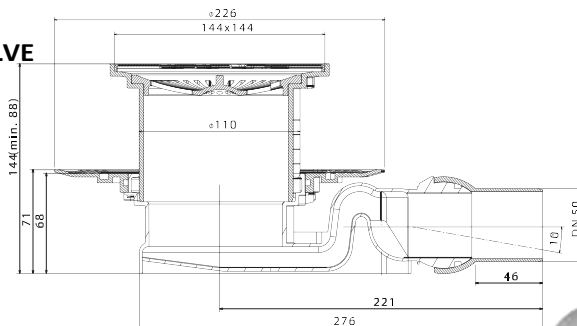

CHARACTERISTICS



Flowrate
upto
49l/min





Min. height

88mm



Grid Class K3

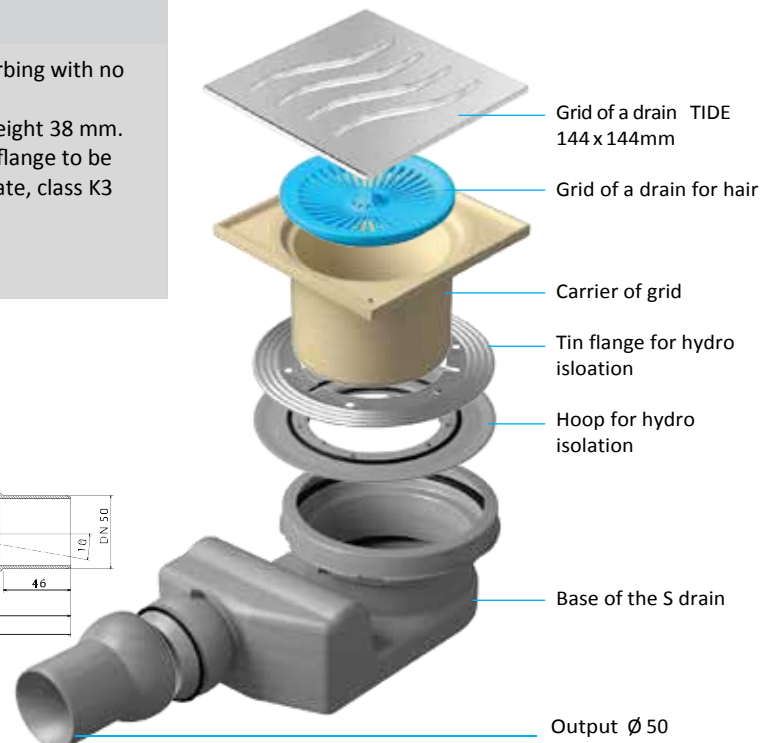

SQUARE 1

Article Number
13000005

Peřtan CONFLUO drain “SQUARE 1” made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,82 l/s. Drain with a removable odour trap (siphon), sealing water height 40 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm

Installation area 110x210 mm


OPTIONAL
IRRETIVABLE VALVE




Article Number
13500002





CORK
Article Number
13500003

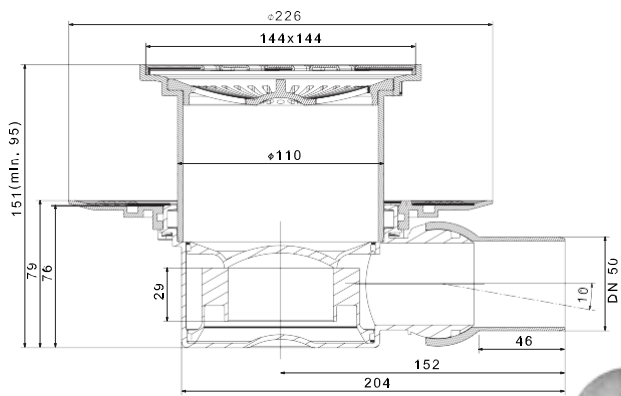

CHARACTERISTICS

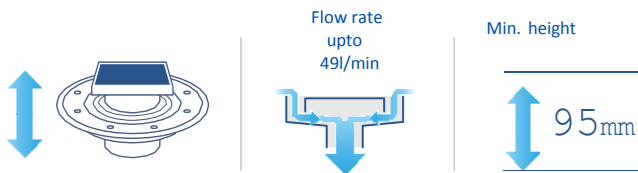

confluo Standard

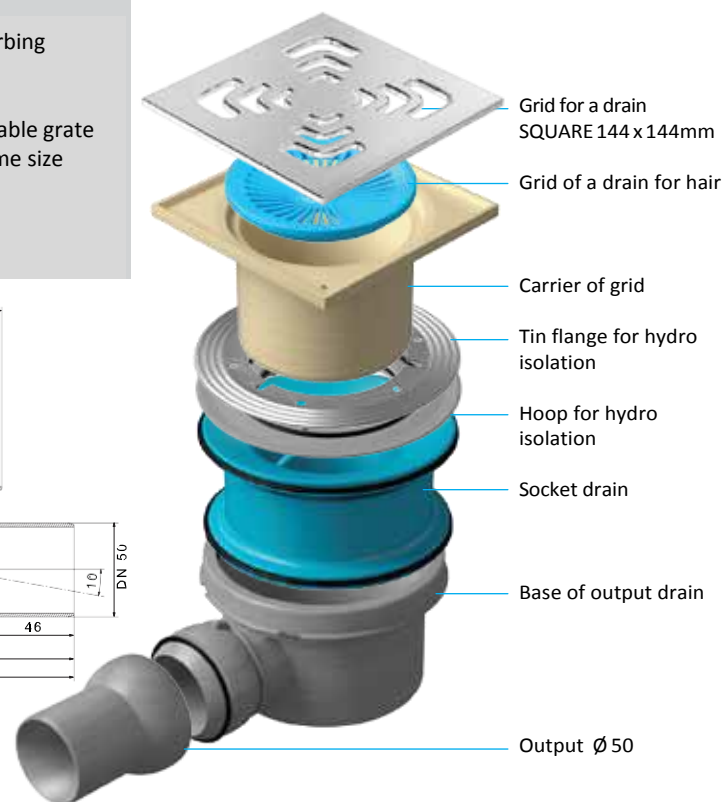

SQUARE 2

Article Number
13000006

Peřtan CONFLUO drain “SQUARE 2” made of PP (polypropylene). Sound absorbing with one side inlet of Ø40. One angle joint adjustable Ø50 outlet. Flow rate 0,82 l/s. Drain with a removable odour trap (siphon), sealing water height 40 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm

Installation area 110x270 mm


OPTIONAL
IRRETRIEVABLE VALVE






Article Number
13500002



CORK
Article Number
13500003

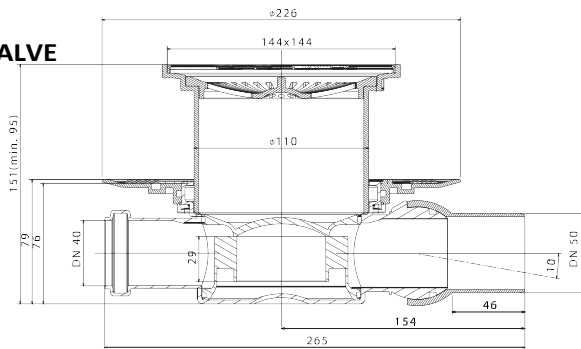

CHARATERISTICS

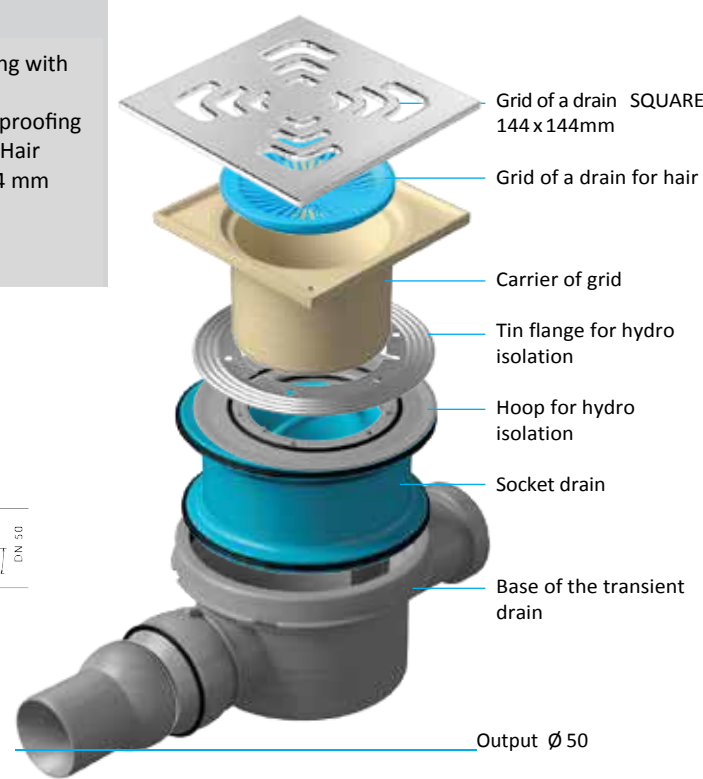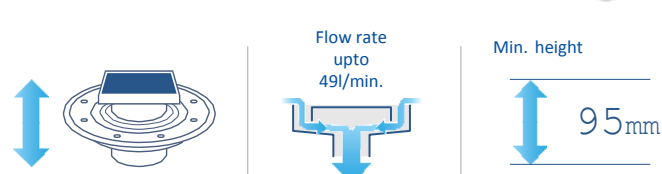

SQUARE 3

Article Number
13000007


Peřtan CONFLUO drain “SQUARE 3” made of PP (polypropylene). Sound absorbing with three side inlets of Ø40. One angle joint adjustable Ø50 outlet. Flow rate 0,82 l/s. Drain with a removable odour trap (siphon), sealing water height 40 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm.

Installation area 230x270 mm


OPTIONAL
IRRETRIEVABLE VALVE



Article Number
13500002

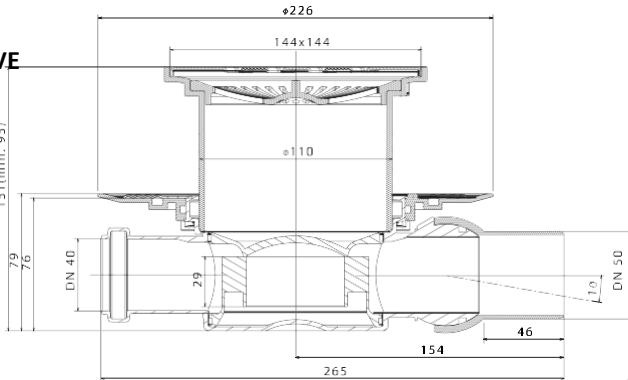

CORK
Article Number
13500003




CHARACTERISTICS

Flow rate
upto
49l/min


Min. Height

95 mm

confluo Standard

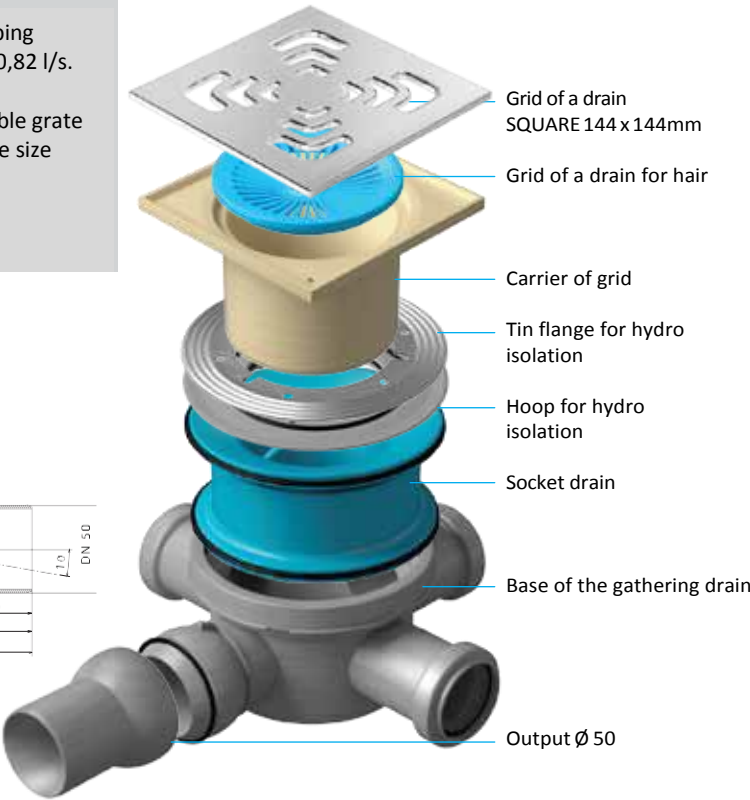

Grid Class K3



SQUARE 4

Article Number
13000008


Peřtan CONFLUO drain “SQUARE 4” made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,91 l/s. Drain with no removable odour trap (siphon), sealing water height 40 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm.

Installation area 120x280 mm


OPTIONAL
IRRETRIEVABLE VALVE



Article Number
13500002

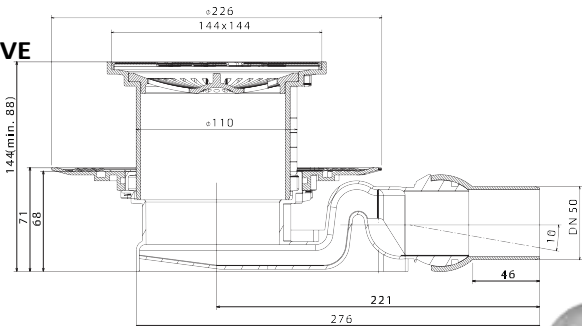

CORK
Article Number
13500003




CHARACTERISTICS


Flow rate
upto
55l/min

Min. Height

88 mm

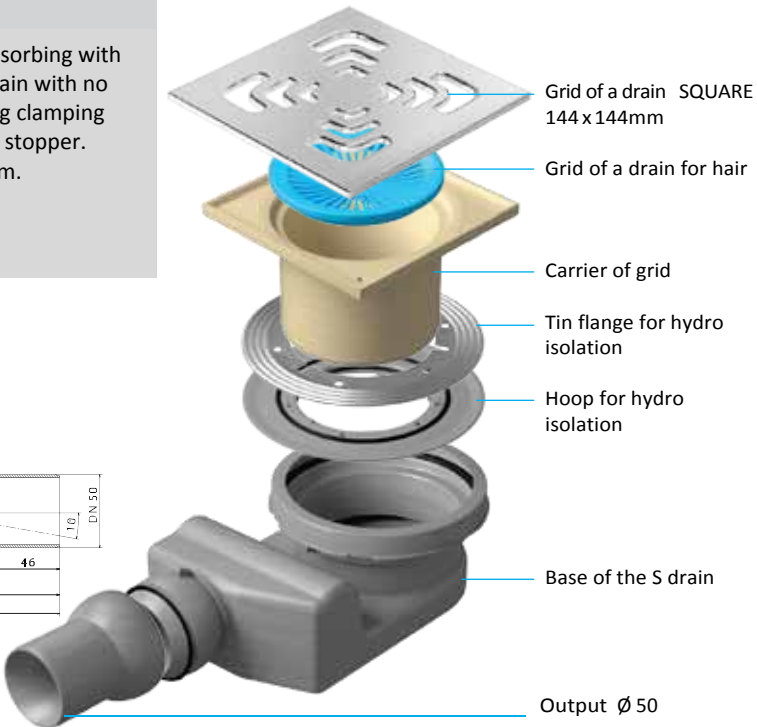

Grid Class K3



DROPS 1

Article Number
13000009


Peřtan CONFLUO drain “DROPS 1” made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,82 l/s. Drain with a removable odour trap (siphon), sealing water height 40 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm

Installation area 110x210 mm


OPTIONAL
IRRETRIEVABLE VALVE



Article Number
13500002

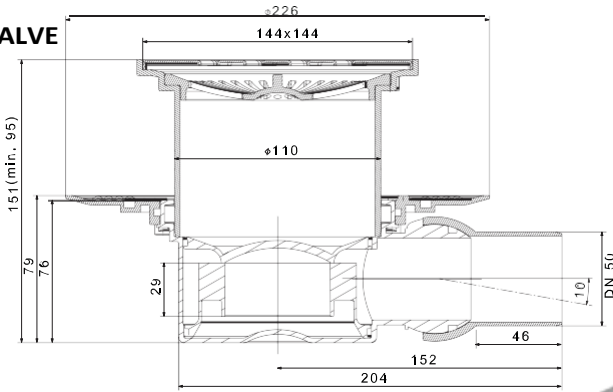

CORK
Article Number
13500003



CHARACTERISTICS




Flow rate
upto
49l/min

Min. Height


95mm



Grid Class K3



confluo Standard

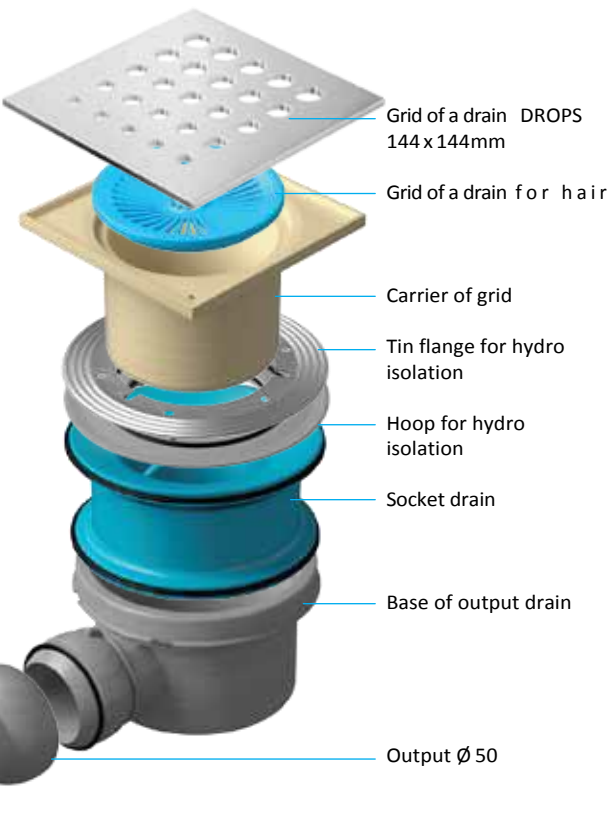

DROPS 2

Article Number
13000010


Peřtan CONFLUO drain “DROPS 2” made of PP (polypropylene). Sound absorbing with one side inlet of Ø40. One angle joint adjustable Ø50 outlet. Flow rate 0,82 l/s. Drain with a removable odour trap (siphon), sealing water height 40 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm.

Installation area 110x270 mm


OPTIONAL
IRRETRIEVABLE VALVE




Article Number
13500002

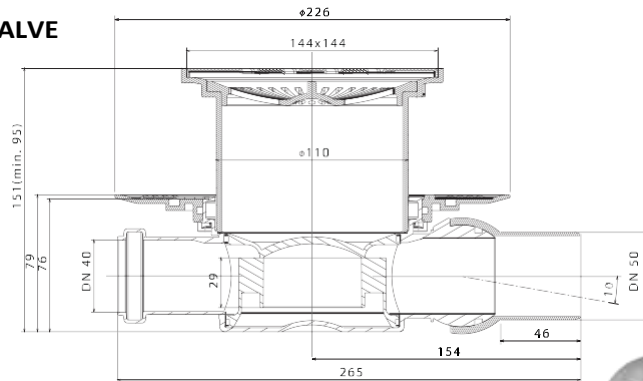

CORK
Article Number
13500003



CHARACTERISTICS





Flow rate
upto
49l/min

Min.Height

95mm



Grid Class K3

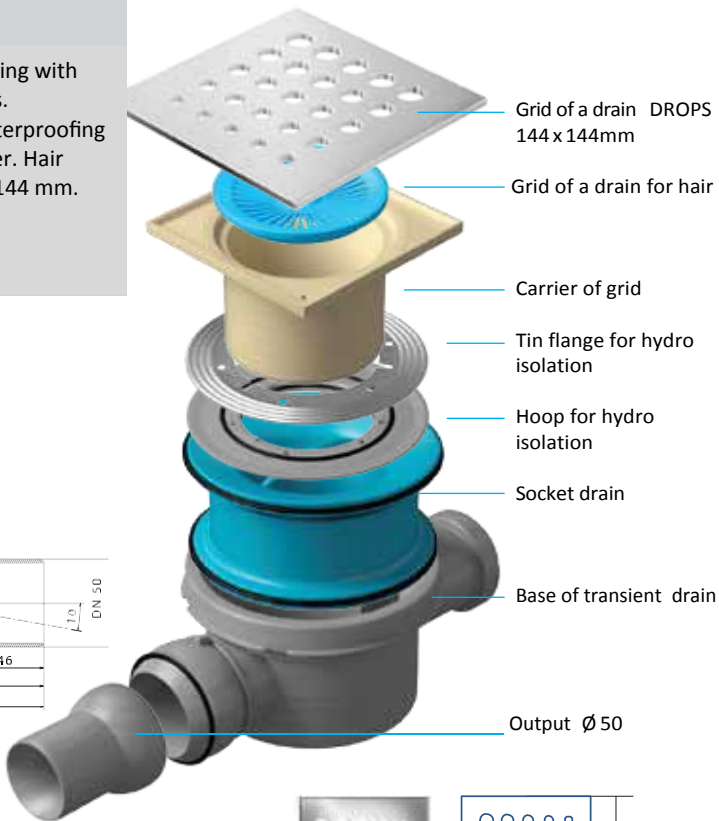

DROPS 3

Article Number
13000011

Peštan CONFLUO drain “DROPS 3” made of PP (polypropylene). Sound absorbing with three side inlets of Ø40. One angle joint adjustable Ø50 outlet. Flow rate 0,82 l/s. Drain with a removable odour trap (siphon), sealing water height 40 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm.

Installation area 230x270 mm


OPTIONAL
IRRETRIEVABLE VALVE




Article Number
13500002



CORK
Article Number
13500003

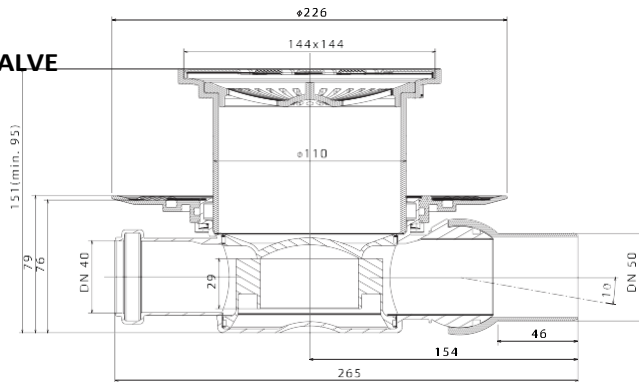

CHARACTERISTICS



Flow rate
upto
49l/min


Min. Height



95 mm




Grid Class K3



144 mm

144 mm

confluo Standard

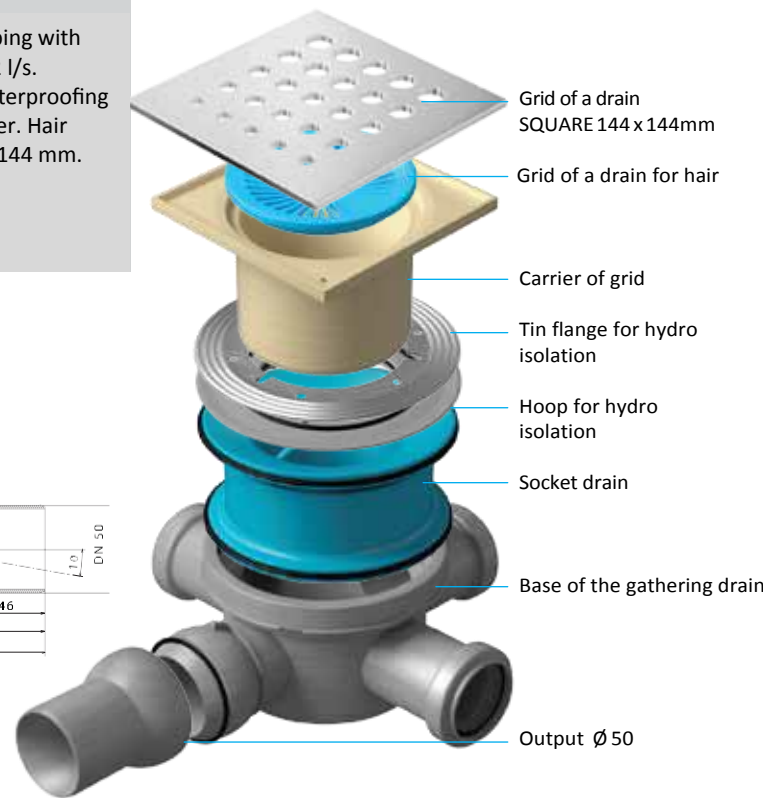


OPTIONAL
IRRETRIEVABLE VALVE





Article Number
13500002



CORK
Article Number
13500003

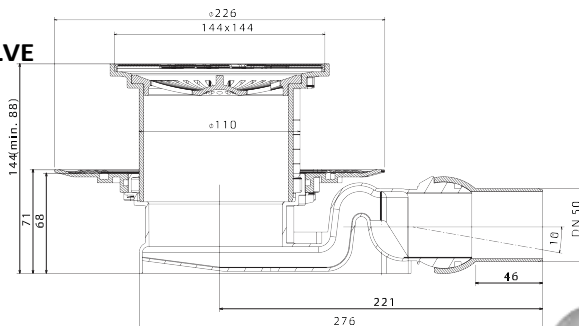

CHARACTERISTICS



Flow rate
upto
55 l/min


Min. Height



88 mm




Grid Class K3



144 mm

144 mm

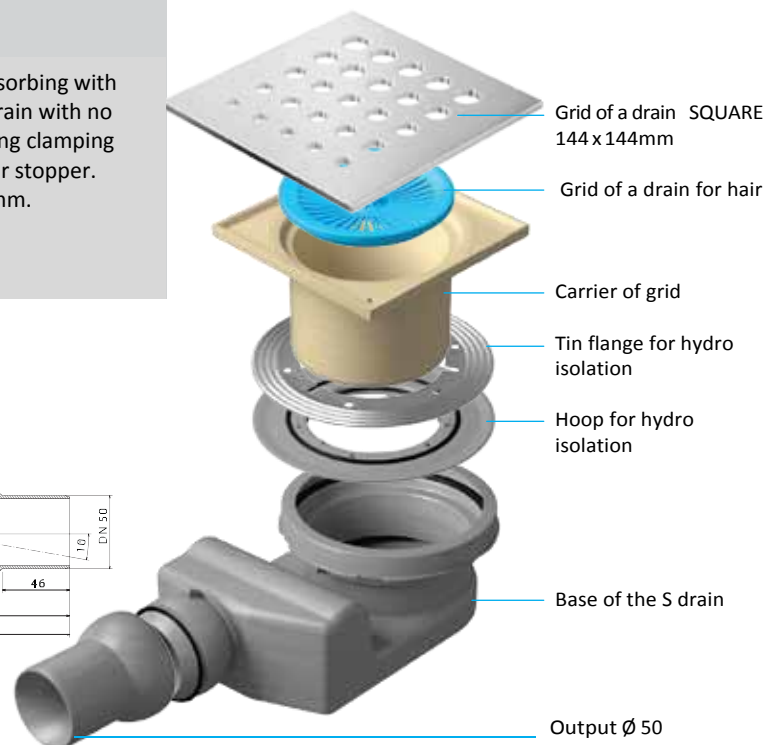

ANGLE 1

Article Number
13000013

Peřtan CONFLUO drain “ANGLE 1” made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,82 l/s. Drain with a removable odour trap (siphon), sealing water height 40 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable angle grate holder. Hair stopper. Stainless steel angle grate, class K3 (up to 300 kg of load). Frame size 194x194 mm.

Installation area 110x210 mm


OPTIONAL
IRRETRIEVABLE VALVE





Article Number
13500002




CORK
Article Number
13500003

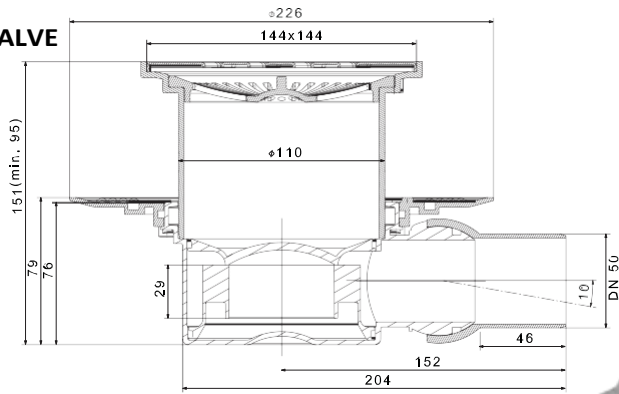

CHARACTERISTICS

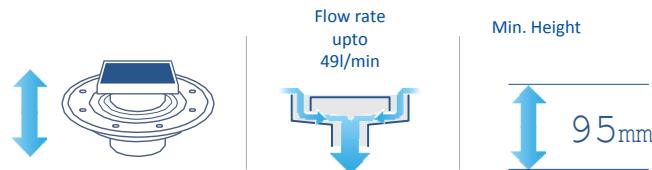

confluo Standard

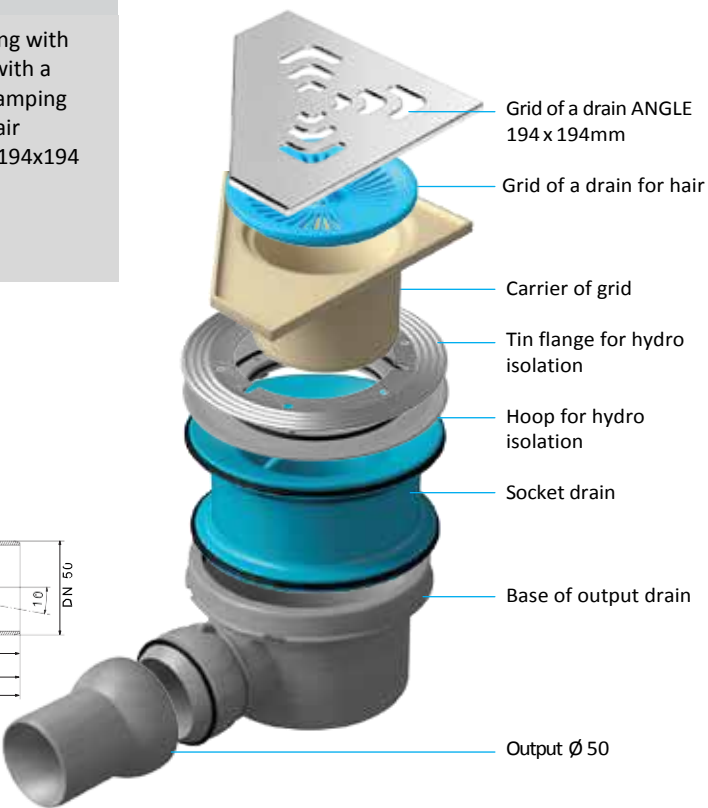

ANGLE 2

Article Number
13000014

Peřtan CONFLUO drain “ANGLE 2” made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,91 l/s. Drain with no removable odour trap (siphon), sealing water height 40 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable angle grate holder. Hair stopper. Stainless steel angle grate, class K3 (up to 300 kg of load). Frame size 194x194 mm.

Installation area 120x280 mm


OPTIONAL
IRRETRIEVABLE VALVE






Article Number
13500002



CORK
Article Number
13500003

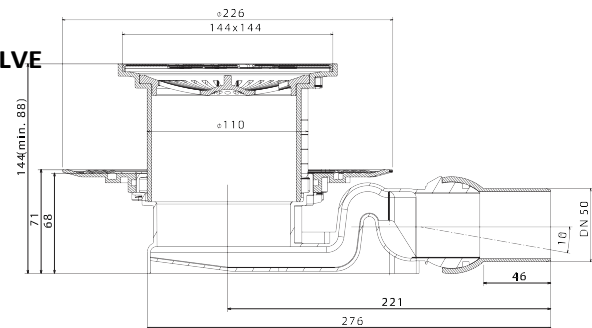

CHARACTERISTICS

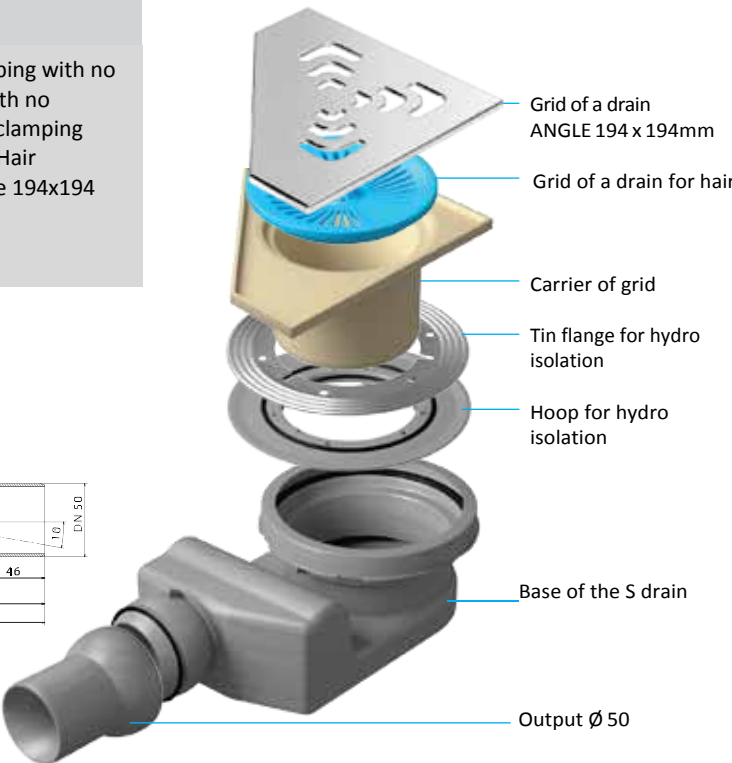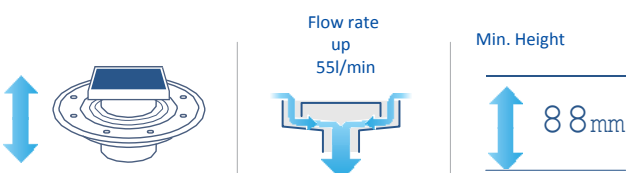

DRY 1

Article Number
13000015

Peštan CONFLUO drain "DRY 1" made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,80 l/s. Drain with a removable odour trap (siphon) of dry drain, sealing water height 38 mm. Removable waterproofing clamping ring that allows the waterproofing flange to be installed on it. Height adjustable dry drain grate holder. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 94x94 mm.

Installation area 110x210 mm


OPTIONAL IRRETRIEVABLE VALVE




Article Number
13500002





CORK
Article Number
13500003

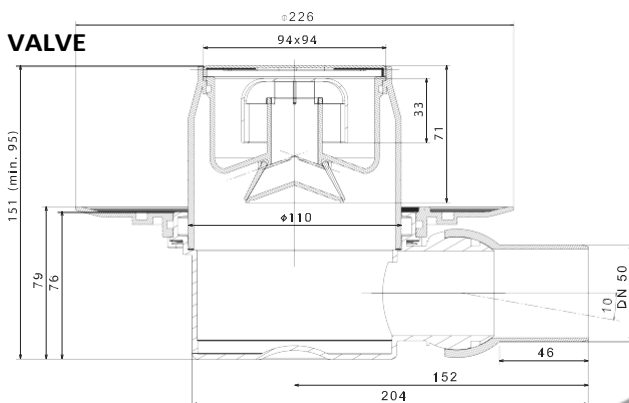

CHARACTERISTICS

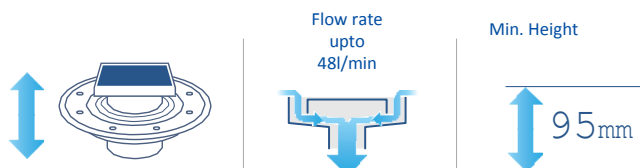

confluo Standard

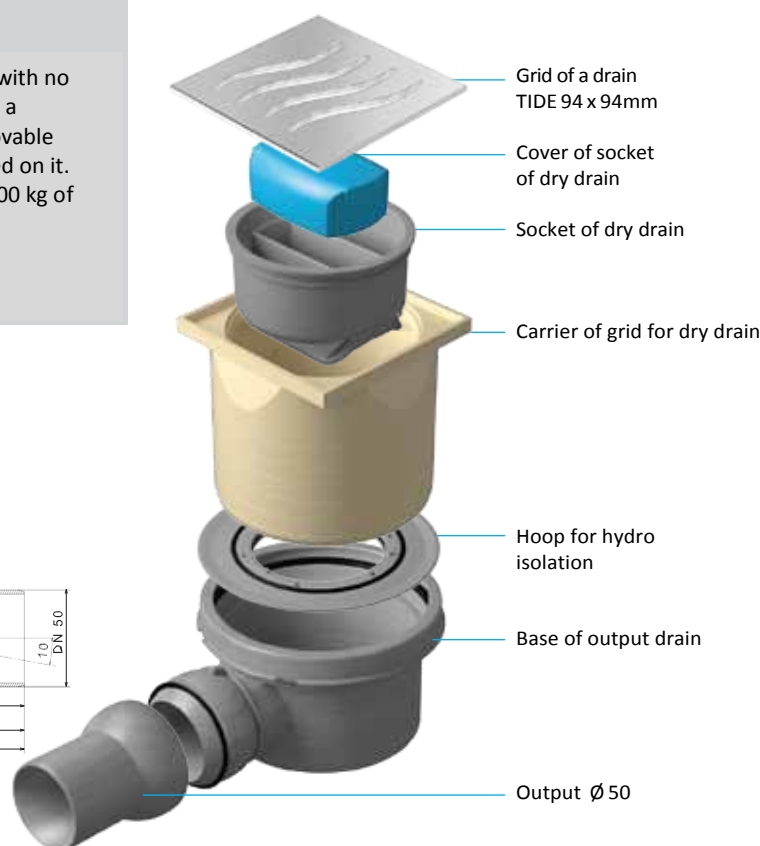

DRY 2

Article Number
13000016

Peštan CONFLUO drain "DRY 2" made of PP (polypropylene). Sound absorbing with one side inlet of Ø40. One angle joint adjustable Ø50 outlet. Flow rate 0,80 l/s. Drain with a removable odour trap (siphon) of dry drain, sealing waterheight 38 mm. Removable waterproofing clamping ring that allows the waterproofing flange to be installed on it. Height adjustable dry drain grate holder. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 94x94 mm.

Installation area 110x270 mm


OPTIONAL IRRETRIEVABLE VALVE






Article Number
13500002



CORK
Article Number
13500003

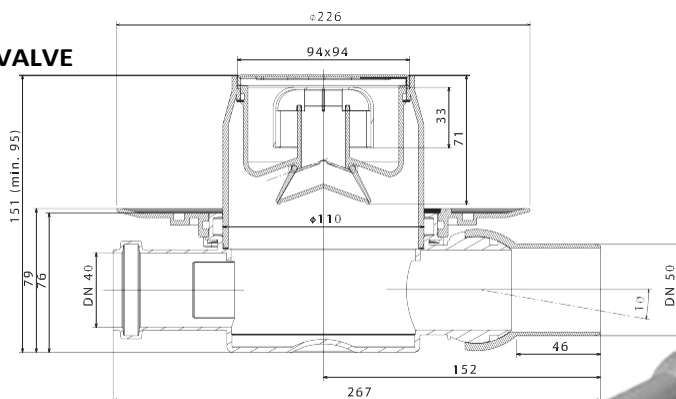

CHARACTERISTICS

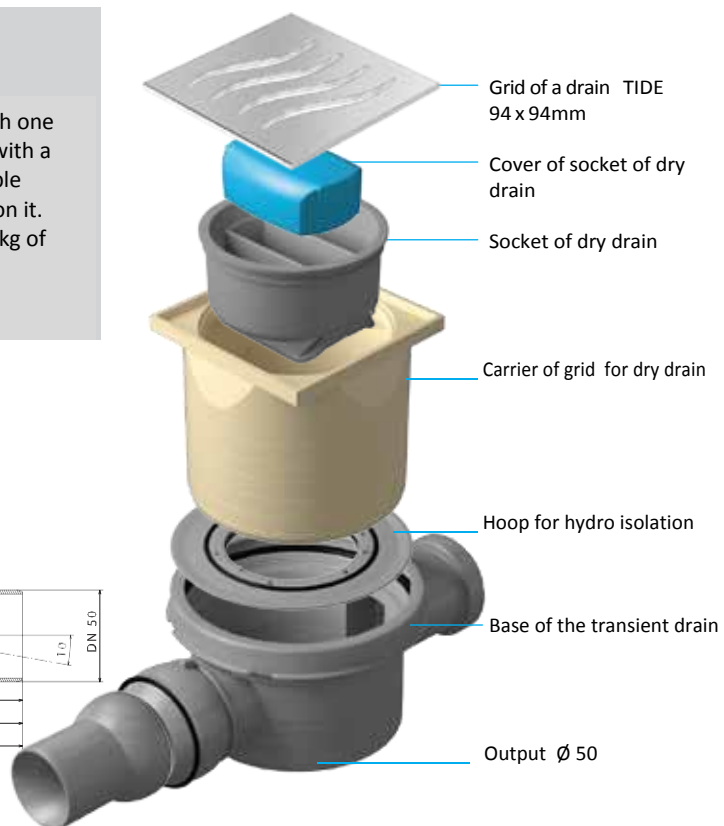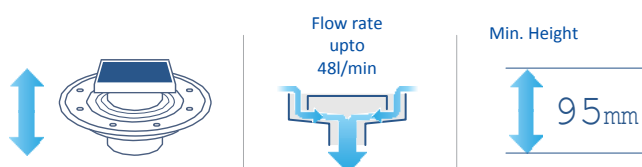

DRY 3

Article Number
13000017

Peštan CONFLUO drain "DRY 3" made of PP (polypropylene). Sound absorbing with three side inlets of Ø40. One angle joint adjustable Ø50 outlet. Flow rate 0,80 l/s. Drain with a removable odour trap (siphon) of dry drain, sealing water height 38 mm. Removable waterproofing clamping ring that allows the waterproofing flange to be installed on it. Height adjustable dry drain grate holder. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 94x94 mm.

Installation area 230x270 mm


OPTIONAL IRRETRIEVABLE VALVE



Article Number
13500002



CORK
Article Number
13500003

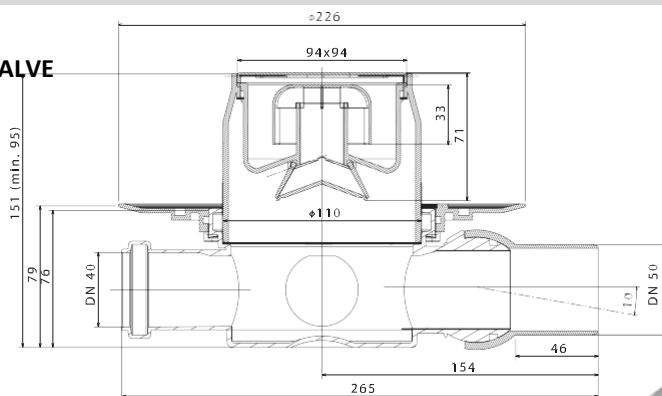



CHARACTERISTICS



Min. Height



Grid Class K3

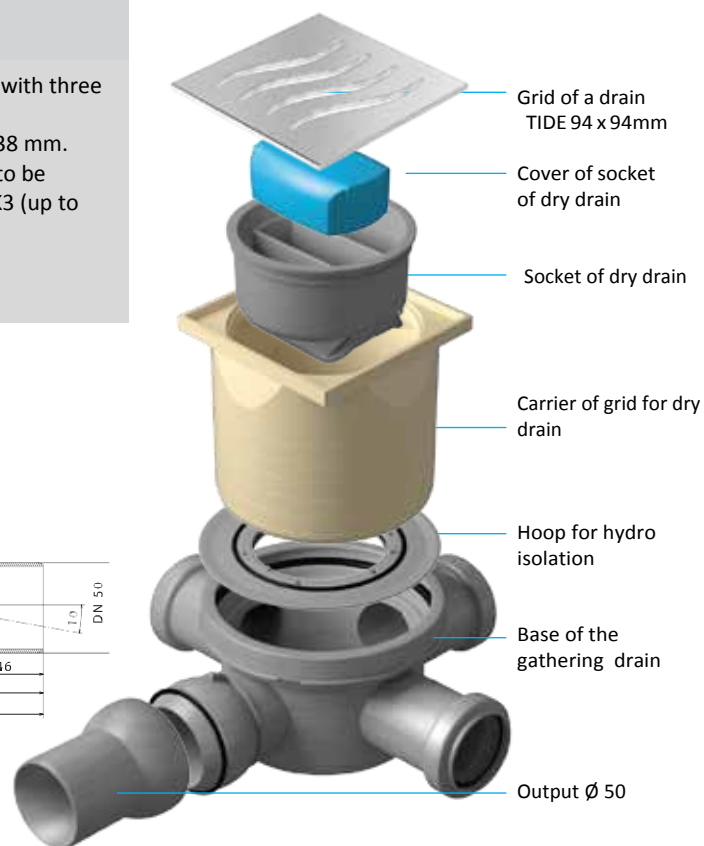

VERTICAL TIDE

Article Number
13000018

Peřtan CONFLUO drain “VERTICALTIDE” made of PP(polypropylene). Sound absorbing with no side inlets. One vertical Ø50 outlet. Flow rate 0,82 l/s. Drain with are movable odour trap(siphon) of vertical drain, sealing water height 30 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm.

Installation area 110x110 mm


OPTIONAL IRRETRIEVABLE VALVE



Article Number
13500002



CORK
Article Number
13500003

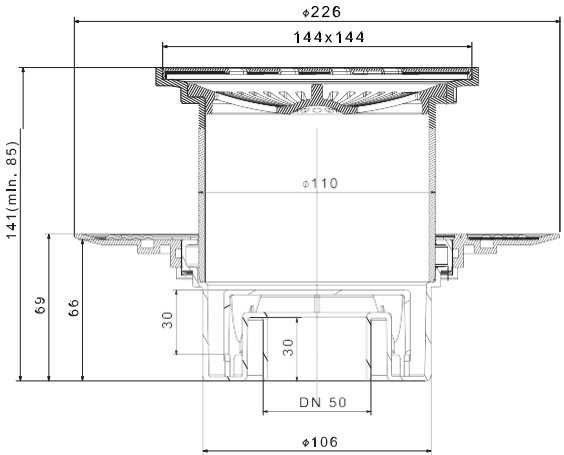


CHARACTERISTICS

Flow rate
upto
49l/min

Min. Height

85 mm



VERTICAL SQUARE

Article Number
13000019

Peřtan CONFLUO drain “VERTICAL SQUARE” made of PP (polypropylene). Sound absorbing with no side inlets. One vertical Ø50 outlet. Flow rate 0,82 l/s. Drain with are movable odour trap (siphon) of vertical drain, sealing water height 30 mm. Water proofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm.

Installation area 110x110 mm


OPTIONAL IRRETRIEVABLE VALVE



Article Number
13500002



CORK
Article Number
13500003


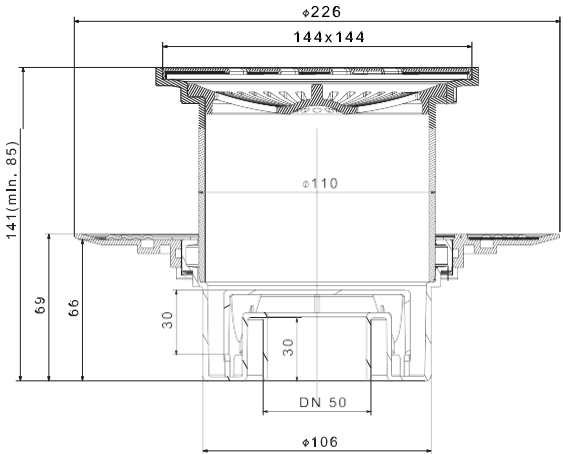


CHARACTERISTICS





Flow rate
upto
49l/min

Min. Height

85 mm



confluo Standard

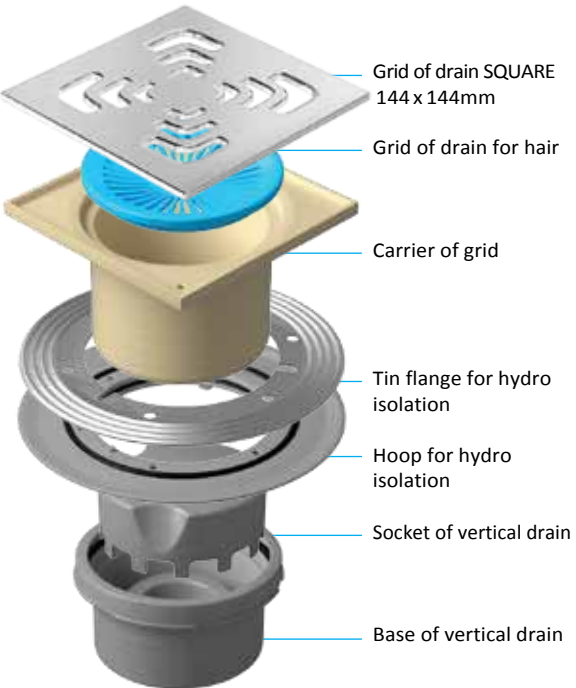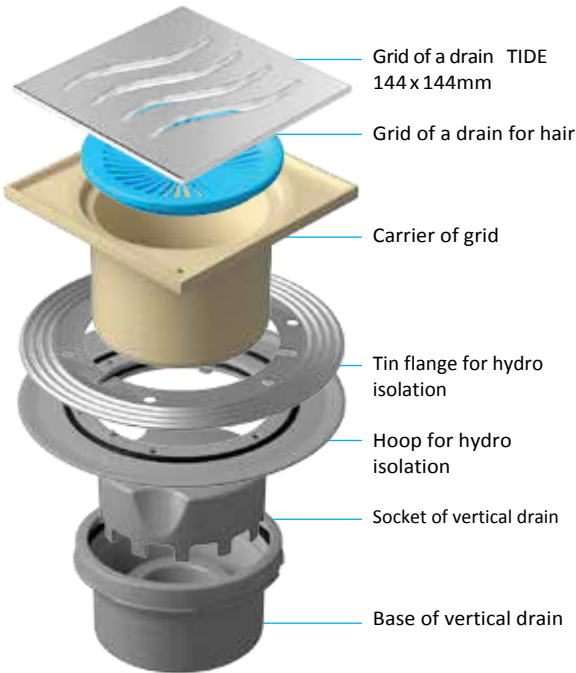

VERTICAL DROPS

Article Number
13000020

Peřtan CONFLUO drain “VERTICAL DROPS” made of PP (polypropylene). Sound absorbing with no side inlets. One vertical Ø50 outlet. Flow rate 0,82 l/s. Drain with are movable odour trap (siphon) of vertical drain, sealing water height 30 mm. Water proofing clamping ring and flange, removable as needed. Height adjustable grate holder. Hair stopper. Stainless steel grate, class K3 (up to 300 kg of load). Frame size 144x144 mm.

Installation area 110x110 mm


OPTIONAL IRRETRIEVABLE VALVE



Article Number
13500002



CORK
Article Number
13500003

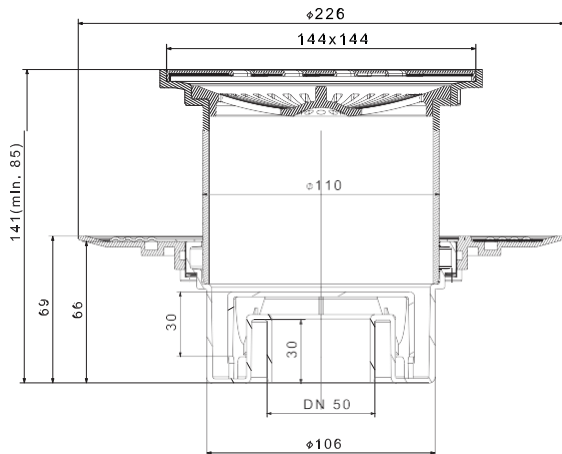



CHARACTERISTICS

Flow rate
upto
49l/min

Min. Height

85 mm

confluo Standard

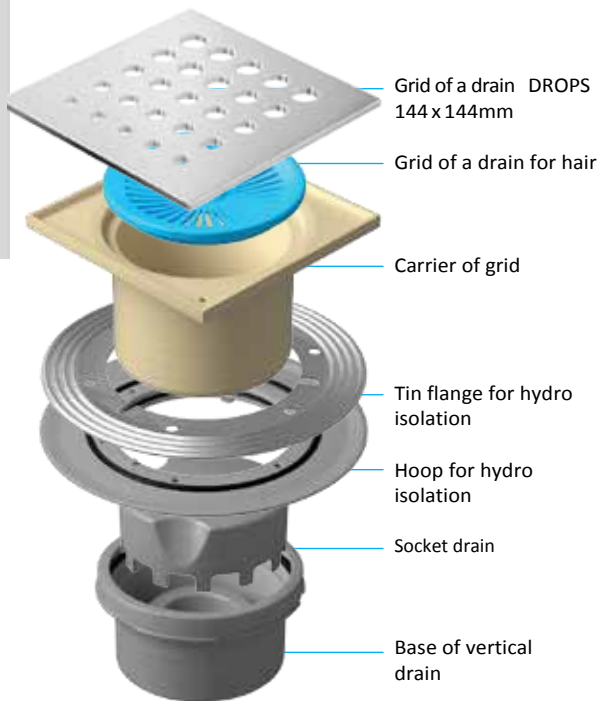

Grid Class K3

VERTICAL ANGLE

Article Number
13000021

Peřtan CONFLUO drain “VERTICAL ANGLE” made of PP (polypropylene).Sound absorbing with no side inlets. One vertical Ø50 outlet. Flow rate 0,82 l/s.Drain with a removable odour trap (siphon) of vertical drain, sealing water height 30 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable angle grate holder. Hair stopper. Stainless steel angle grate, class K3 (up to 300 kg of load). Frame size 194x194 mm.

Installation area 110x110 mm


OPTIONAL IRRETRIEVABLE VALVE



Article Number
13500002



CORK
Article Number
13500003


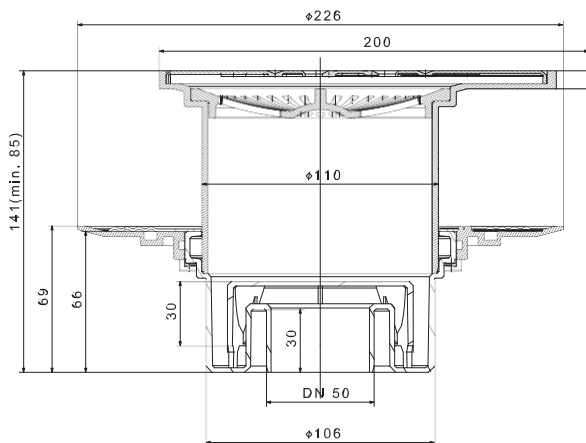


CHARACTERISTICS

Flow rate
upto
49l/min

Min. Height

85 mm

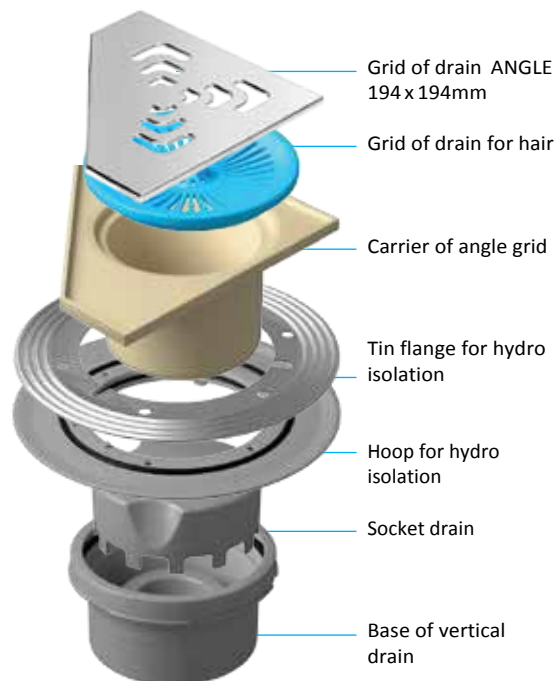

Grid Class K3

VERTICAL DRY

Article Number

13000022

Peštan CONFLUO drain "VERTICAL DRY" made of PP (polypropylene). Sound absorbing with no side inlets. One vertical Ø50 outlet. Flow rate 0,80 l/s. Drain with two removable odour traps (siphon) of vertical drain, sealing water height 30 mm and 38 mm. Waterproofing clamping ring and flange, removable as needed. Height adjustable dry drain grate holder. Stainless steel angle grate, class K3 (up to 300 kg of load). Frame size 94x94 mm.

Installation area 110x110 mm

OPTIONAL

IRRETRIEVABLE VALVE



Article Number


13500002



CORK

Article Number


13500003

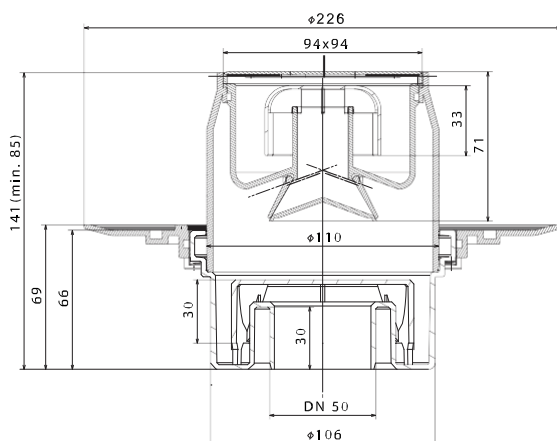


CHARACTERISTICS

Flow rate
upto
48l/min


Min. Height



85mm

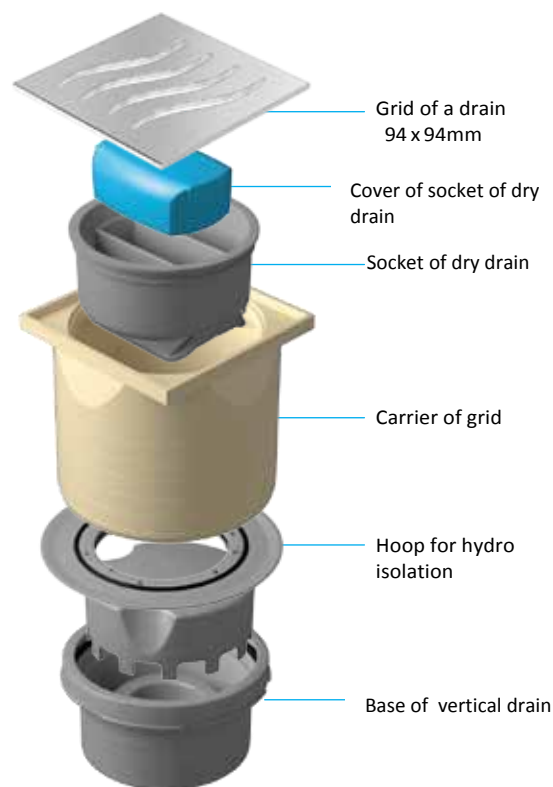

Grid Class K3



Confluo Premium

02

SHAPE:

Line, highly adjustable to the slopes

USAGE:

Private bathrooms, bathrooms in the hotels, hospitals, fitness centers etc.

DETAILS:

Line, small size of the frame, stainless steel, adjustable to the slope

SIZE:

Length of drains designed in variants of: 300 mm, 450 mm, 550 mm, 650 mm, 750 mm, 850 mm

FEATURES:

Drain in shape of line, low profile, takes up little space under the floor

Grid made of stainless steel with possible additions of elements made of glass

Increased flow of a drain

May be combined with other drains in the same room that are connected to this drain

A simple model with good features

Made from modern materials with high level of system security

Easy to install

**SPECIAL ACCESSORIES FOR
CONFLUO DRAINS:**

Hair filter




LINE 300

Article Number
13100001

Peřtan CONFLUO drain “LINE 300” made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,75 l/s. Drain with no odour trap (siphon), sealing water height 40 mm. Height adjustable reducer for linear drain and feet for height and inclination adjustment. Adjustable grate holder. Hair stopper. Stainless steel mask and stainless steel grate, class K3 (up to 300 kg of load). Frame size 278x54 mm.

Installation area 120x280 mm

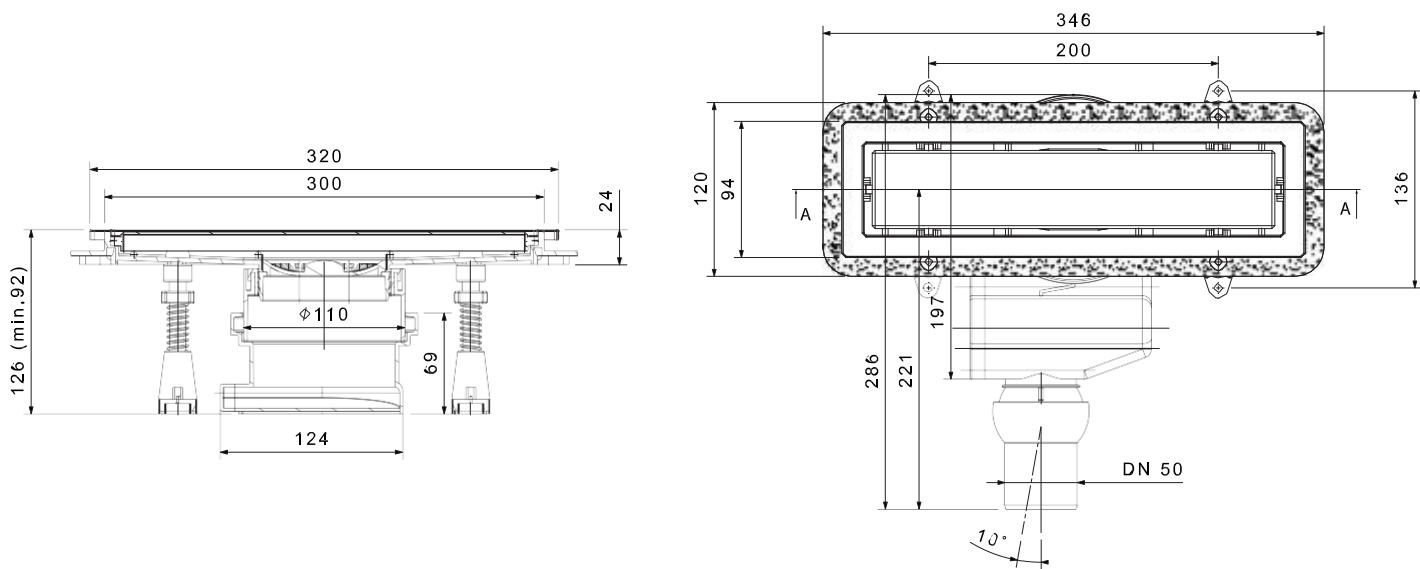


CHARACTERISTICS

Flow rate
upto
45l/min



Min. Height

92mm

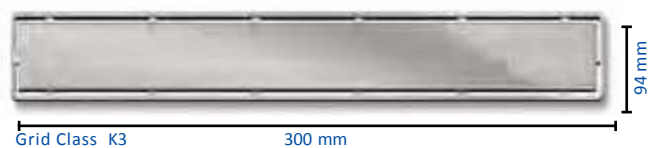


LINE 450




Article Number
13100002

Peštan CONFLUO drain “LINE 450” made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,75 l/s. Drain with no odour trap (siphon), sealing water height 40 mm. Height adjustable reducer for linear drain and feet for height and inclination adjustment. Adjustable grate holder. Hair stopper. Stainless steel mask and stainless steel grate, class K3 (up to 300 kg of load). Frame size 428x54 mm.

Installation area 120x280 mm

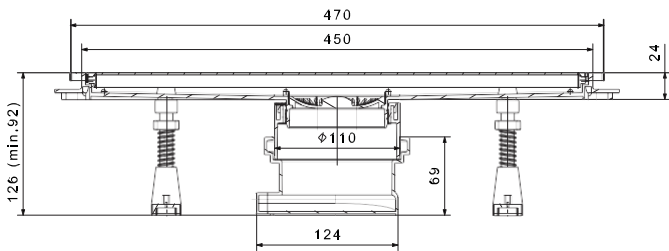

CHARACTERISTICS

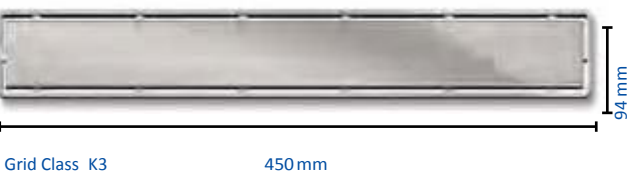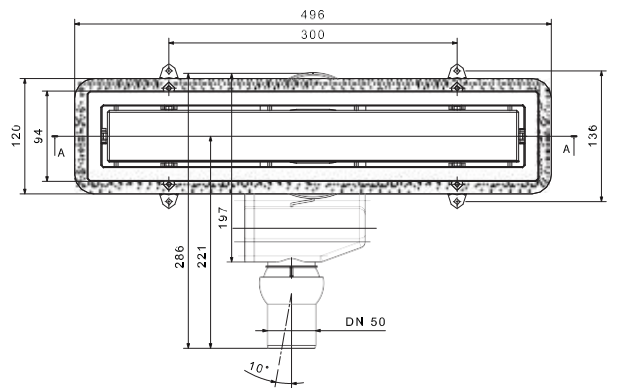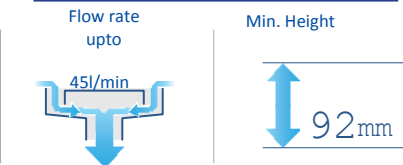


LINE 550




Article Number
13100003

Peštan CONFLUO drain “LINE 550” made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,75 l/s. Drain with no odour trap (siphon), sealing water height 40 mm. Height adjustable reducer for linear drain and feet for height and inclination adjustment. Adjustable grate holder. Hair stopper. Stainless steel mask and stainless steel grate, class K3 (up to 300 kg of load). Frame size 528x54 mm.

Installation area 120x280 mm

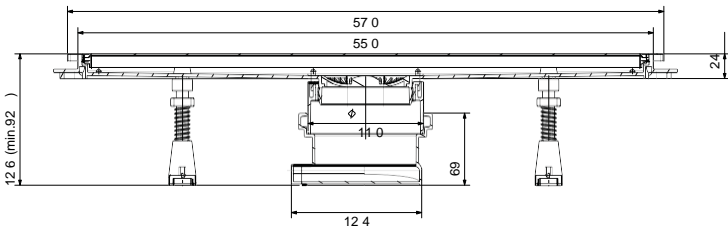

CHARACTERISTICS

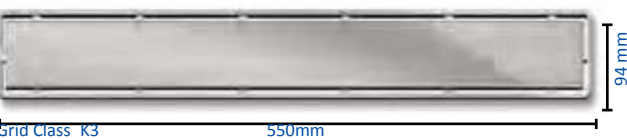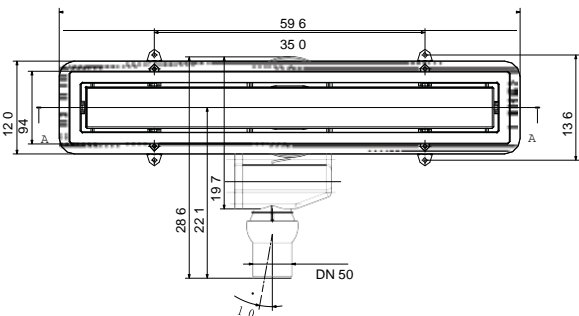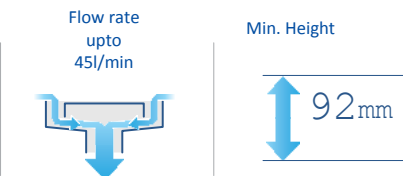


LINE 650

Article Number
13100004

Pešťan CONFLUO drain "LINE 650" made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,75 l/s. Drain with no odour trap (siphon), sealing water height 40 mm. Height adjustable reducer for linear drain and feet for height and inclination adjustment. Adjustable grate holder. Hair stopper. Stainless steel mask and stainless steel grate, class K3 (up to 300 kg of load). Frame size 628x54 mm

Installation area 120x280 mm

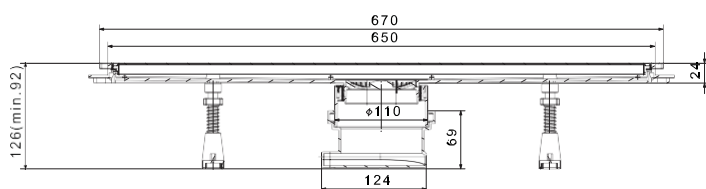


CHARACTERISTICS

Flow rate
upto
45l/min



Min. Height

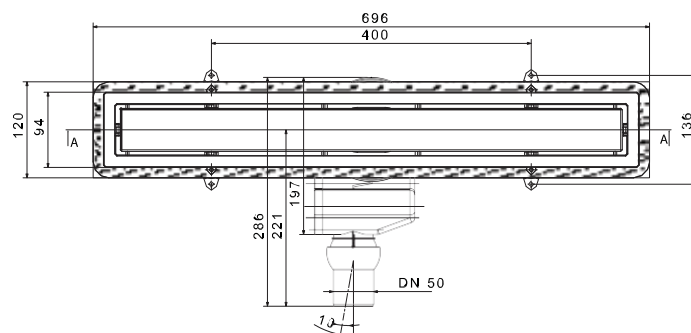


LINE 750

Article Number
13100005

Pešťan CONFLUO drain "LINE 750" made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,75 l/s. Drain with no odour trap (siphon), sealing water height 40 mm. Height adjustable reducer for linear drain and feet for height and inclination adjustment. Adjustable grate holder. Hair stopper. Stainless steel mask and stainless steel grate, class K3 (up to 300 kg of load). Frame size 728x54 mm.

Installation area 120x280 mm


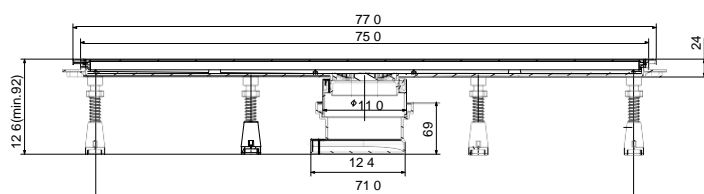


CHARACTERISTICS

Flow rate
upto
45l/min



Min. Height

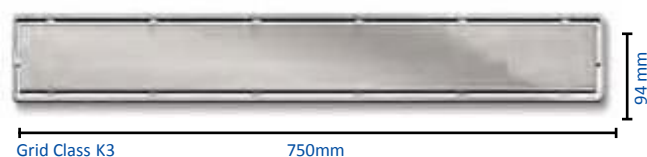
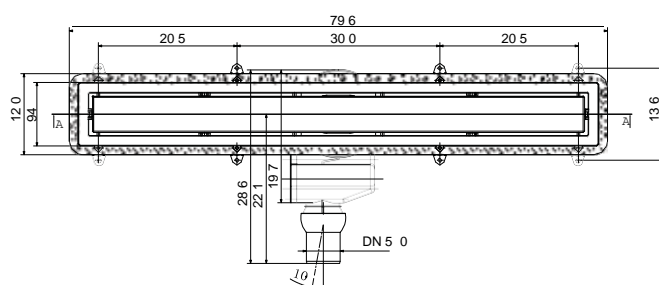


LINE 850

Article Number
13100006

Peštan CONFLUO drain "LINE 850" made of PP (polypropylene). Sound absorbing with no side inlets. One angle joint adjustable Ø50 outlet. Flow rate 0,75 l/s. Drain with no odour trap (siphon), sealing water height 40 mm. Height adjustable reducer for linear drain and feet for height and inclination adjustment. Adjustable grate holder. Hair stopper. Stainless steel mask and stainless steel grate, class K3 (up to 300 kg of load). Frame size 828x54 mm.

Installation area 120x280 mm

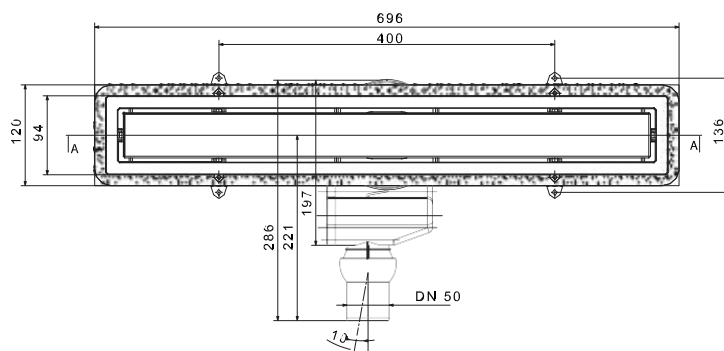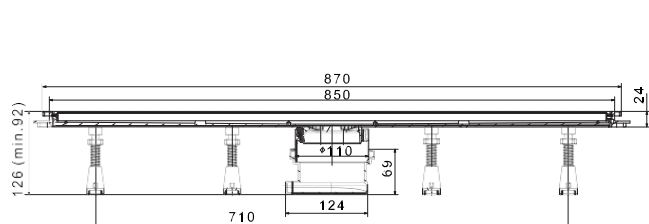

CHARACTERISTICS

Flow rate

upto
45l/min



Min. height



3 in 1

SYSTEM

GLASS



METAL



CERAMIC



METAL GRID LINE





ALTAY MEKANİK ISI SİSTEMLERİ İNŞ. TUR. İÇ ve DIŞ. TİC. LTD. ŞTİ. 'tescilli markasıdır.

Anadolu Bulvarı 2. Cadde A.T. B. İş Merkezi E Blok No: 92 06105 Macunköy-Ankara/TÜRKİYE
Tel: +90(312) 397 30 60 (pbx) • Fax: +90(312) 397 33 44

info@altayisisistem.com.tr
www.altayplumbing.com.tr